

SPORTEC[®] Team Cup-X is an underlay for additional impact sound insulation and comfort. It can be installed under all SPORTEC[®] floor coverings in indoor areas and is especially suited under SPORTEC[®] style slabs for weight-lifting areas.

Material


A mixture of black recycling rubber granules bonded with polyurethane elastomer.

Product Design

Colour: black



Surface: granule structure

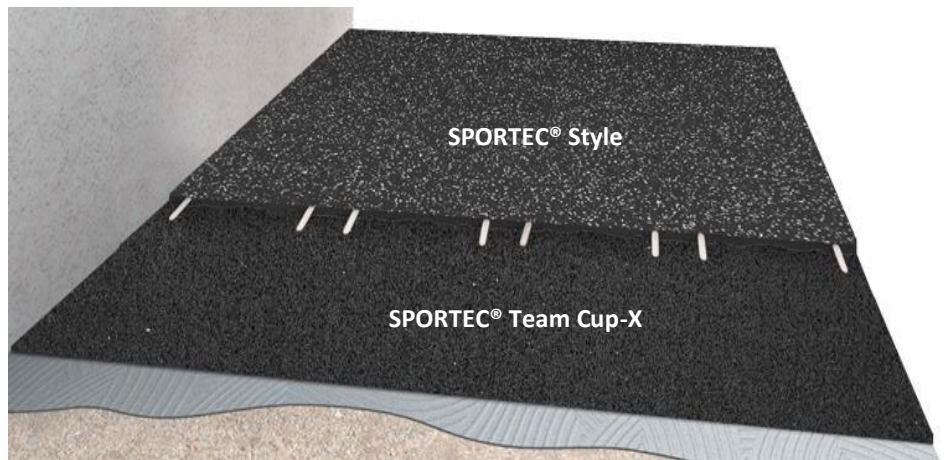

Dimensions / Tolerances / Weight

Thickness(es):	8, 10, 12 and 15mm ($\pm 0.3\text{mm}$)
Roll width:	1250mm ($\pm 1.5\%$)
Roll length:	15m (at 8mm) 10m (at 12mm) 12m (at 10mm) 8m (at 15mm) ($\pm 1.5\%$)
Density:	approx. 650kg/m ³
Area weight:	approx. 5.2kg/m ² (at 8mm) approx. 6.5kg/m ² (at 10mm) approx. 7.8kg/m ² (at 12mm) approx. 9.8kg/m ² (at 15mm)

Product Testing

Tensile strength:	min. 0.2N/mm ² (EN ISO 1798)
Elongation at break:	min. 35% (EN ISO 1798)
Water permeability:	4500cm/h (EN 12616)


Step sound insulation: approx. 28dB* (internal tested)
(*indications for system consisting of 10mm SPORTEC® Team Cup-X and 30mm SPORTEC® Style)
(*given values are parameters, in individual case testing system on site is required)

Dynamic stiffness: 18MN/m³ (at 10mm) (internal tested)
11MN/m³ (at 10mm) (internal tested)

VOC emission rating:



Shock absorption Elasticlayer

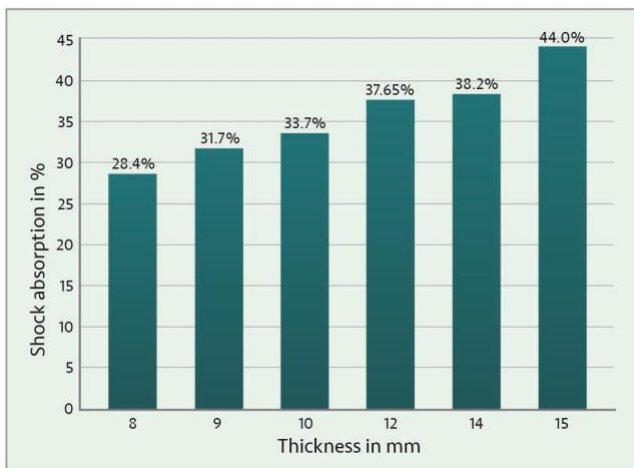

Installation

Installation has to be done in accordance with the Installation Recommendation of SPORTEC® Team Cup-X.



Product: SPORTEC® TEAM CUP-X

Revision: 1.0

Issued: 03/2022